

DATASHEET TI-CS4

Tekin 100V 4" Low Profile Ceiling Speaker

Features

- 4" Speaker driver 90dB (1W @ 1m)
- Low profile 54mm in height
- Slide switch to adjust wattage tapping
- PCB with removeable termination plug
- 0.33W, 0.66W, 1.5W wattage tapping
- Built-in blocking capacitor for line monitoring
- Threaded 4mm insert for optional seismic bracket
- Made from ABS with metal grille
- Easy-fit spring clip mounting system
- Wide frequency response suitable for public address (PA)
- Only weighs 370g
- 10 Year Manufacturer's Warranty



TI-CS3 - Front

Overview

The Tekin CS4 100V ceiling speaker has been designed for emergency warning, fire alarm, and public address systems.

The low-profile design (54mm height) also includes Integrated PCB with slide switch for wattage tapping, blocking capacitor for line monitoring, 1.5W transformer and removable termination plug.

Add the easy-fit spring clips and total speaker weight of only 370g ensures a simpler, safer installation.

The speaker also has a 4mm threaded centre insert for optional seismic bracket sets which includes:

- Slotted adjustable L bracket (inc. 4mm bolt)
- 700mm square bar
- Square bar bracket (inc. 2 x nuts/bolts)
- End brackets x 2 (select grid, rondo, or wood fixings)



TI-CS3 - Rear



info@tekin.nz


www.tekin.nz

Technical Specification

	TI-CS4
Sound Pressure Level (SPL)	90 dB (1W @ 1m)
Dimension (Dia x H)	167 x 54mm
Materials	ABS with Metal Grille
Hole Cut-out Size	152mm
Weight	370g
Voltage	100 Vrms
Power Tapping	0.33W, 0.66W, 1.5W
Mounting (Standard)	Spring Clip x 2
Mounting (Optional)	Seismic Bracket Set
Frequency Response	110 Hz – 15 kHz



Speaker Frequency Response

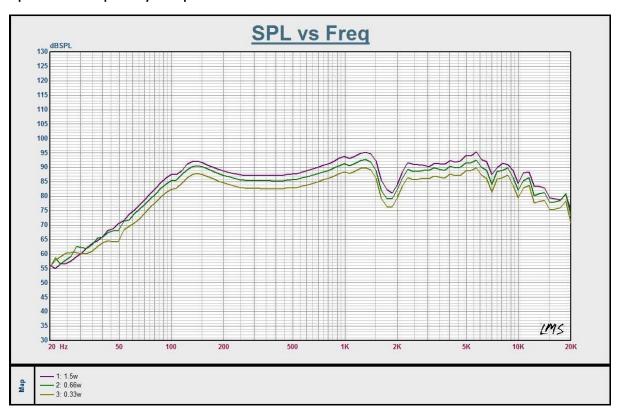

Product Ordering Code

Product Code	Product Description
TI-CS4	100V 4" Low Profile Ceiling Speaker
CS4-SB-G	Seismic Bracket Set (Grid Ceiling)
CS4-SB-R	Seismic Bracket Set (Rondo Ceiling)
CS4-SB-W	Seismic Bracket Set (Wood Batten Ceiling)

