

6000PLUS/BASE & 3000PLUS/BASE Low Profile Common Mounting Base

- Quick and simple to Install
- Aesthetic, low profile design
- Compatible with Protec 3000PLUS or 6000PLUS series detectors
- Screen / earth terminal available (6000PLUS/BASE version)
- Robust terminal wiring
- Continuity switch on 6000PLUS/BASE version
- Continuity diode included on 3000PLUS/BASE to comply with BS5839
- Approved to EN54 when used with Protec detectors



NOTE: Image shows 6000PLUS Base

The Protec 3000PLUS and 6000PLUS standard base are designed for use with either the Protec 3000PLUS or 6000PLUS series fire detection devices. It allows the detectors to be mounted directly to any flat surface, or BESA box. Provision is also made for surface mount trunking entry via side breakouts.

The 6000PLUS/BASE has an in-built earth connection to allow easy termination of cable screens and permit earth continuity on broken segments of cable.

The base features robust wiring terminals with captive clamping washers to ensure secure wiring termination. Terminals are provided inside the moulding for loop / zone connections and the termination of cable screening. Provision is also made for the connection of an optional remote LED if required.

Loop or zone continuity is maintained by a switch on the 6000PLUS/BASE or a low forward Voltage diode on the 3000PLUS/BASE.


Order Codes

3000PLUS/BASE
6000PLUS/BASE

Technical Specification




Dimensions

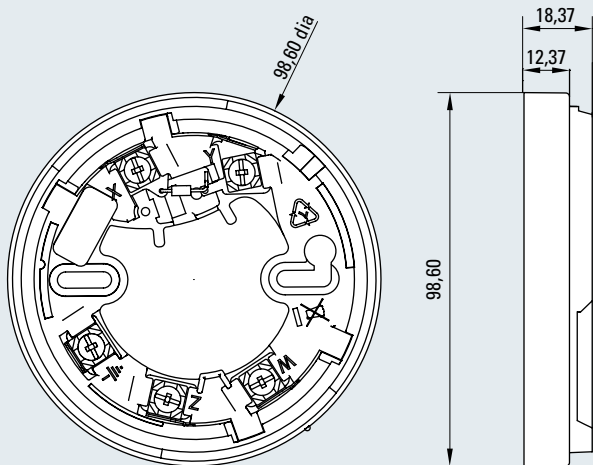

Technical Specification

Environment	-10 to 50°C, 95% R.H (non-condensing or icing)
Ingress Protection	IP32
Weight	56g
Voltage Range	30V maximum
Mounting	Surface or BESA box
Material	White Polycarbonate V0 rated
Application	Indoor Installation
EMC	CE marked (EEC89/336)
Product Approval	Bases are included in the detector head approval

3000PLUS Detector Wiring Details

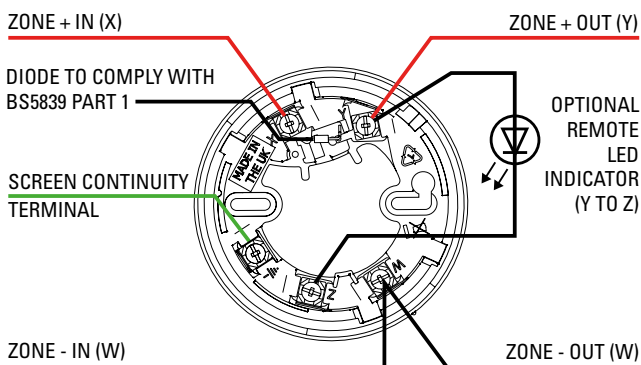

6000PLUS Detector Wiring Details

